


328 Trucks in Roundabout Sign Installation

The purpose of this Guideline is to update the signs for installation at roundabout intersections. This Guideline is provided to satisfy the requirements of the Arizona Revised Statutes ARS 28-729, ARS 28-778 and federal guidance.

The “State Law Trucks in Roundabout Have Right-of-Way” Sign (R4-108) should be installed on each approach leg in advance of the roundabout for new construction. The sign should be installed 100-300 feet from the roundabout on approach. Installation should attempt to utilize existing sign or lighting infrastructure, where feasible. Avoid conflict with any existing regulatory or warning signs, and avoid reducing the sight distance for pedestrians or drivers at the roundabouts. In the event a conflict exists, alternative locations for installation must be selected.

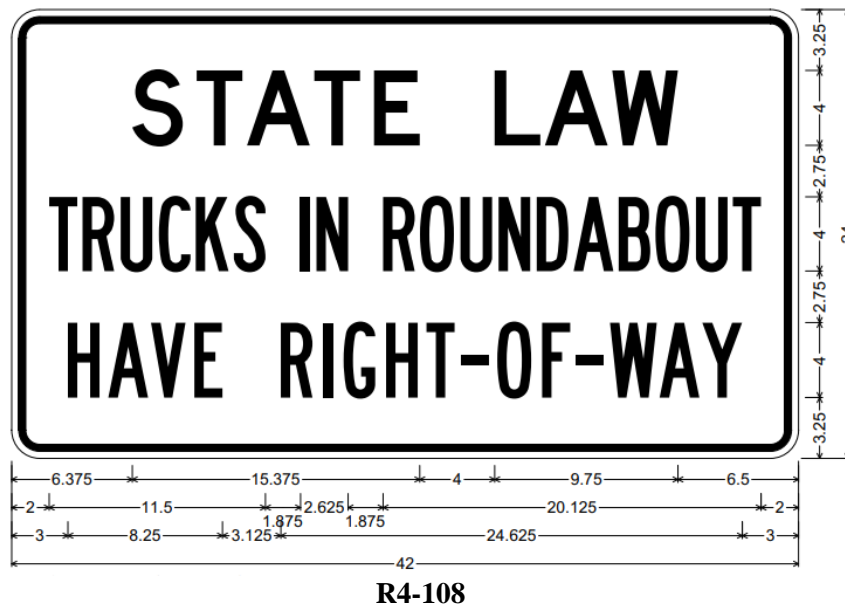

The previous assembly, “Caution Yield To Trucks” Sign (W16-18) under the Yield Sign, shown below, shall serve its useful life; in cases where a sign is knocked down or damaged, all approaches of the roundabout should be updated with the new R4-108 sign. In these instances, the W16-18 sign should be removed from below the existing Yield sign assembly at each roundabout leg.

