


SR 88 Study, MP 222 to MP 229


ADOT's Preferred Hybrid Alternative

Recommended improvements include:

- Add roadway chip seal on flatter sections
- Add concrete barrier on Fish Creek Hill
- Rehabilitate/repair existing bridges
- Construct walls where needed to contain slopes
- Add rock bolts to potentially unstable slopes
- Upsize drainage elements
- Add pull-outs

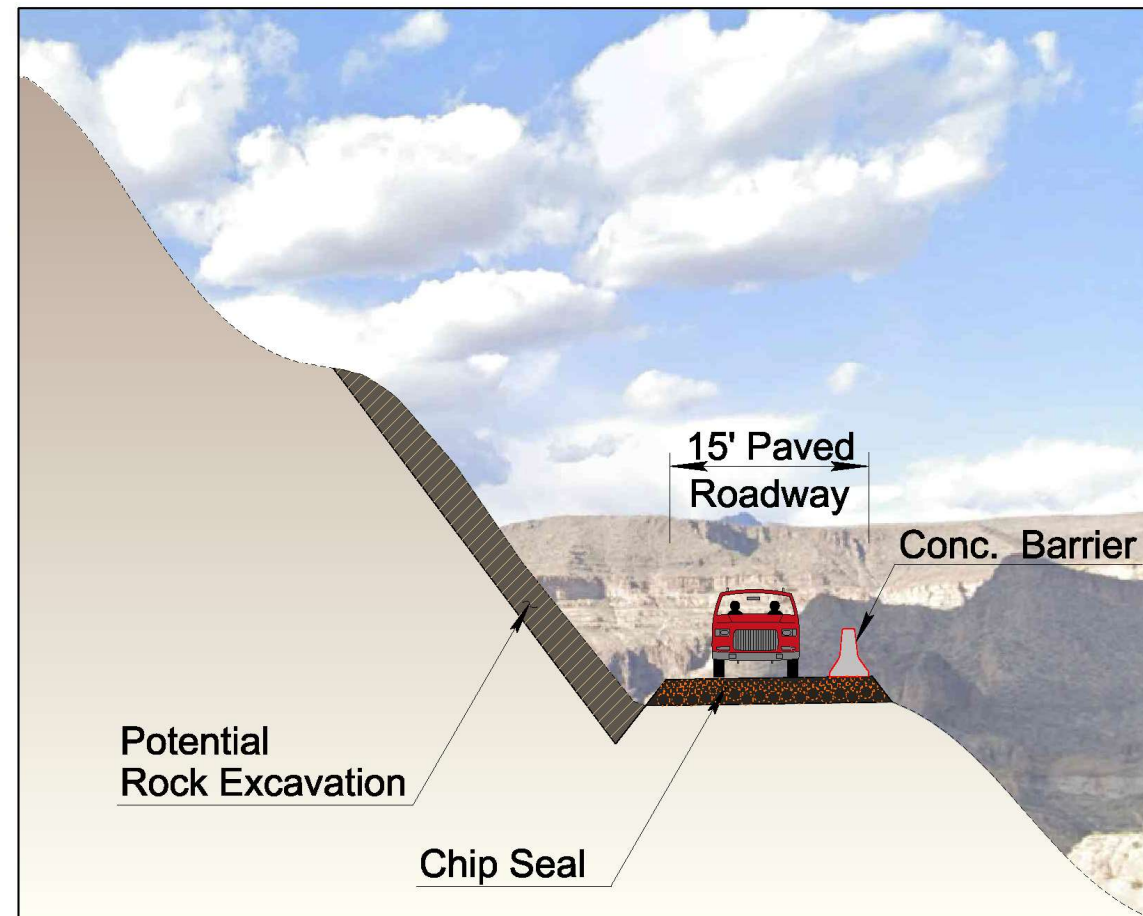

FISH CREEK HILL TYPICAL AREA

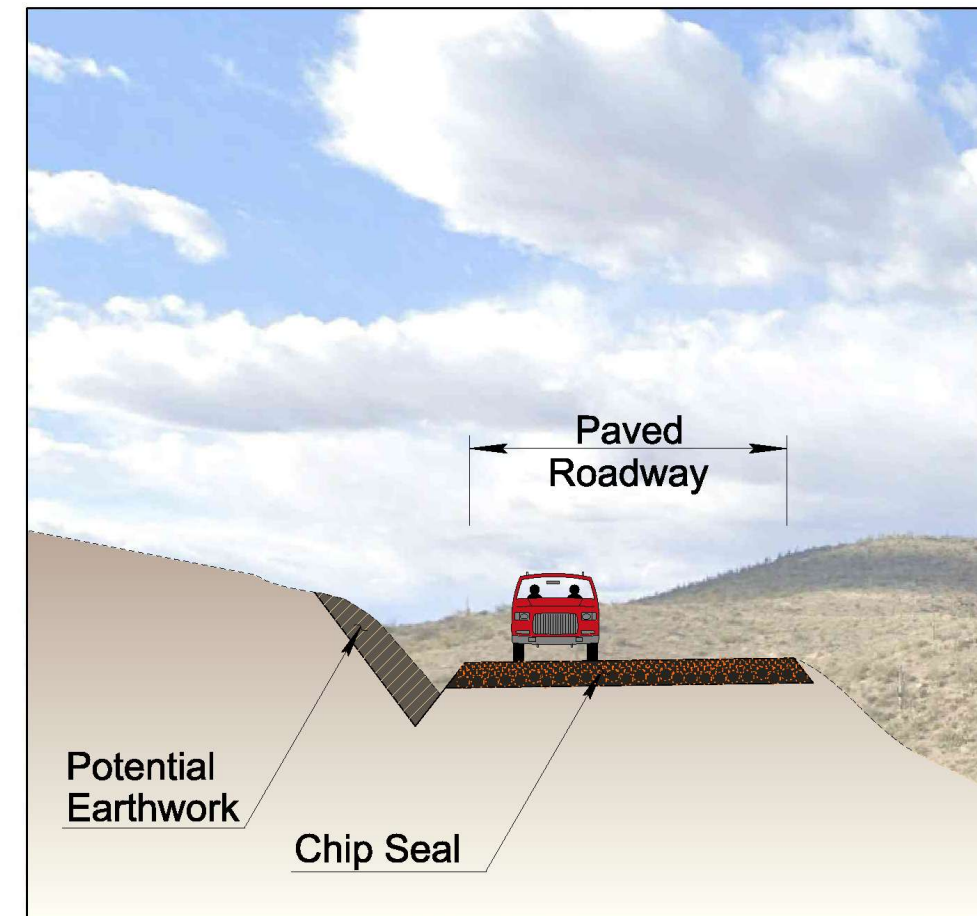

EAST OF FISH CREEK HILL
TYPICAL AREA